
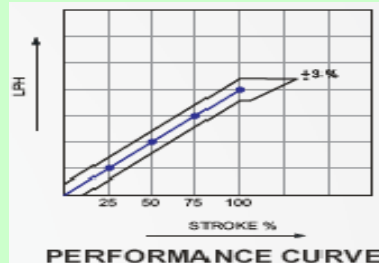


MP-20

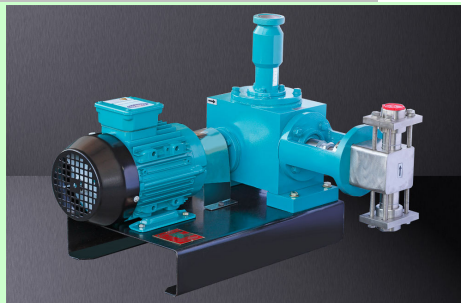

SELECTION CHART


PUMP SPEED – 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNG ER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED – 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	Motor (k.w.)
15	15	0.37	MP - 20	14	120	33	15	0.75
33	15			20	95	68	15	
49	15			24	70	98	15	
87	15			32	40	174	15	
136	15			40	20	271	25	
164	15			44	16	328	25	
195	15			48	12	391	25	
212	15			50	10	421	25	
247	25	0.75		54	10	495	25	
326	25			62	8	652	25	
369	25			66	5	739	25	
392	25			68	5	785	25	
439	25			72	3	1000	25	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20	2	Gland Packing	PTFE
3	Through bush	SS304, SS316, hastalloy, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, hastalloy, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

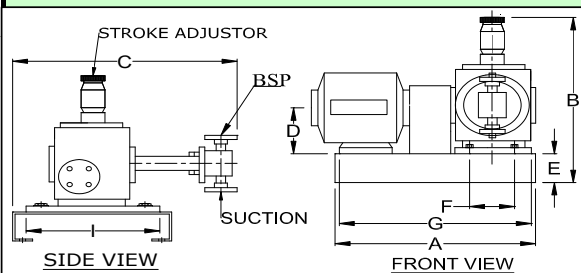

DIMENSIONS IN MM

MODEL	A	B	C	D	E	F	G	I
MM II	402	405	450	75	70	90	385	268

WEIGHT (App) : 62 KG.
PACKING SIZE : 20 x 20 x 17 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.
Tel. : +91-253- 6649383,
Mobile : 09130022891, 9130022894, 9130022893
E-mail : minimaxpumps Pvt Ltd@gmail.com

Website : www.dosingpumpsindia.co.in / www.minimaxdosing.co.in



ISO 9001 2008