
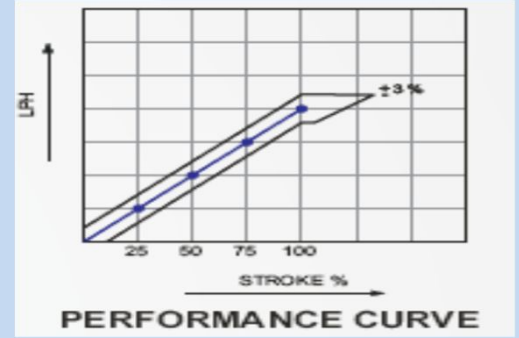


TECHNICAL CATALOGUE

HDMP-35 S3

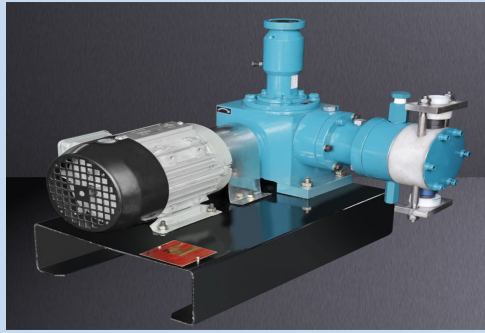

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia. mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor (HP)				Cap. LPH	Suc. Del. mmNB/BSP	Motor (HP)
570	25	1.5	HD MP 35 S3	62	23	1141	25	3
608	25			64	22	1214	25	
646	40			66	21	1293	40	
686	40			68	20	1372	40	
727	40			70	18	1454	40	
770	40			72	17	1538	40	
812	40			74	16	1625	40	
857	40			76	15	1714	40	
903	40			78	15	1805	40	
949	40			80	14	1900	40	
998	40	3		82	13	1995	40	5
1047	40			84	13	2094	40	
1097	40			86	12	2195	40	
1149	40			88	12	2300	40	
1202	40			90	11	2404	40	
1256	40			92	11	2512	40	

MATERIAL OF CONSTRUCTION

1	Plunger	EN 8
2	Liquid End	PP,PTFE,SS 304,316,316 L,HASTEALLOY
3	NRV	PP,PTFE,SS 304,316,316 L,HASTEALLOY

FEATURES :

- a Different Flow Rates can be achieved in a single model with stroke adjustment feature
- b The design & Performance of Hyd Series Pumps conforms to API675.

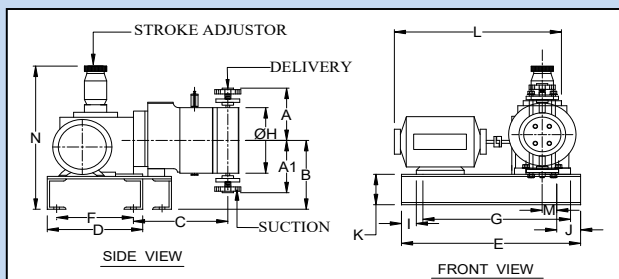

PUMP DIMENSIONS IN MM

L	H	h	W	A	B	C	D	d	J	j
775	435	80	210	480	240	400	290	22	300	170

WEIGHT (App) : 50 KG.

PACKING SIZE : 24 x 22 x 17 Inches



MINIMAX PUMPS PRIVATE LIMITED

Address: PLOT NO.82/2, BEHIND SEVA SERVICE CENTER, AMBEBAHULA GAON ROAD,
VILHOLI SHIVAR , NASHIK-422010

CONTACT:9130022891,9130022892,9130022893,9890147773

Email id: minimaxpumpspvtltd@gmail.com, rotomaxpumps@gmail.com,

mkt@minimaxpumps.com, sales@minimaxpumps.com



ISO 9001 2008