



HDMP 20-S1

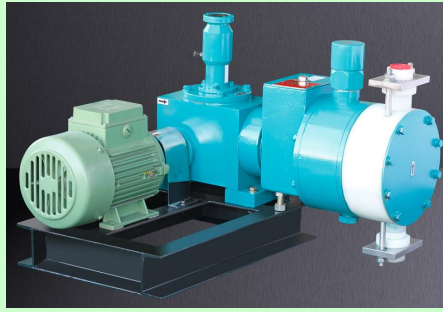

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. NB/BSP	Motor k.w
11	15	0.37	HD MP 20 S1	16	80	43	15	0.75
17	15			20	60	68	15	
24	15			24	50	98	15	
48	15			26	48	115	15	
68	15			28	25	133	15	
82	15			30	20	153	15	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	1	Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	2	Gland Packing	PTFE
4	Non Return	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	3	NRV Balls	SS, PTFE, Ceramic

FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

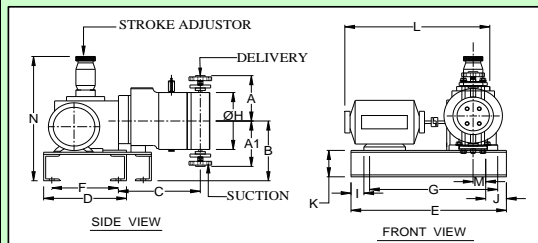

DIMENSIONS IN MM

A	A1	B	C	D	E	F	
130	130	180	250	200	340	170	
G	H	I	J	K	L	M	N
330	Ø150	10	15	75	400	30	350

WEIGHT (App) : 36 KG.

PACKING SIZE : 18 x 16 x 16 Inches