
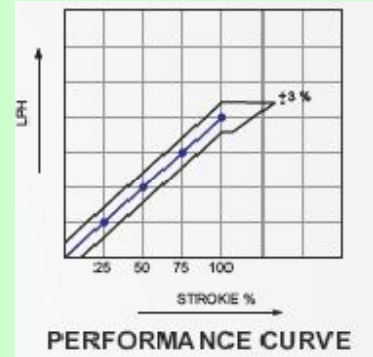


HDMP-35 S2

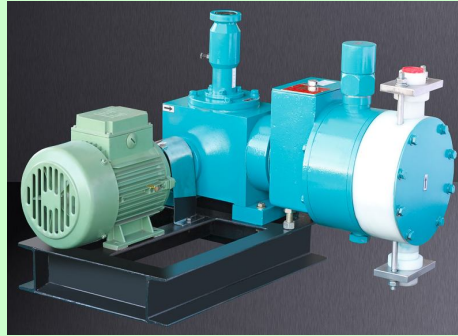

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. NB/BSP	Motor k.w				Cap. LPH	Suc. Del. NB/BSP	Motor k.w
59	15	0.75/1.1	HD MP-35 S2	20	50	119	15	0.75
86	15			24	48	171	15	
152	25			32	46	304	25	1.1/ 2.2
238	25			40	44	475	25	
342	25			48	39	684	25	
433	25			50	31	742	25	
571	25			60	23	1068	25	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	4	NRV Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20,P.P.,PVC,PTFE	5	NRV Balls	SS304,SS316 PTFE, Glass, Ceramic
3	Non Return	SS304, SS316, alloy20,P.P.,PVC,PTFE			

FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset. Jacketing head available
- The design & Performance of Pumps conforms to API675.

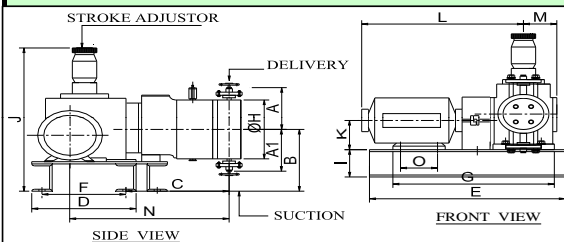

DIMENSIONS IN MM

A	A1	B	C	D	E	F	G	H
205	205	275	240	560	605	305	543	Ø150
I	J	K	L	M	N	O		
75	490	90	590	180	640	125		

WEIGHT (App) : 140 KG.

PACKING SIZE : 28 x 24 x 23 Inches