
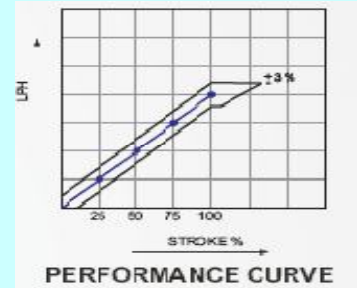


HDMP-60 S3

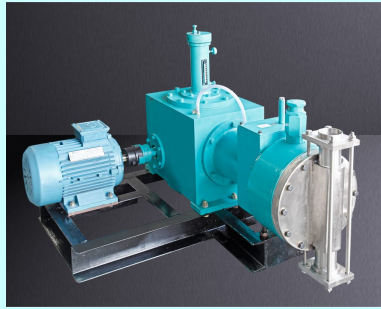

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. NB/BSP	Motor k.w
587	25	3.7	HDMP 60 S3	48	50	1172	40	5.5
742	25			54	47	1485	40	
979	25			62	45	1957	40	
1074	40	2.2		66	42	2216	40	3.7
1320	40			72	28	2639	40	
1753	40			82	24	3420	80X50	
2061	40	1.5		90	19	4122	80X50	5.5
2545	80X50			100	15	5089	80X80	
3080	80X50			110	12	6158	80X80	
3664	80X50			120	10	7329	80X80	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	4	NRV Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	5	NRV Balls	SS, PTFE, Glass, Ceramic
3	Non Return	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE			

FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

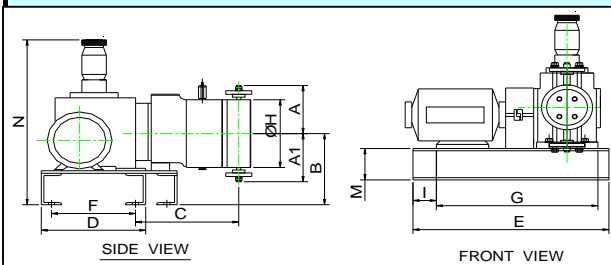

DIMENSIONS IN MM

A	A1	B	C	D	E
285	285	275	445	495	810
F	G	H	I	M	N
460	670	Ø290	100	75	640

WEIGHT (App) : 220 KG.

PACKING SIZE : 36 x 42 x 31 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.
Tel. : +91-253-6649383
Mobile : +91-9130022891, 9130022894, 9130022893
E-mail : minimaxpumpspvttd@gmail.com

www.dosingpumpsindia.co.in / www.minimaxdosing.co.in

Website



ISO 9001 2008