
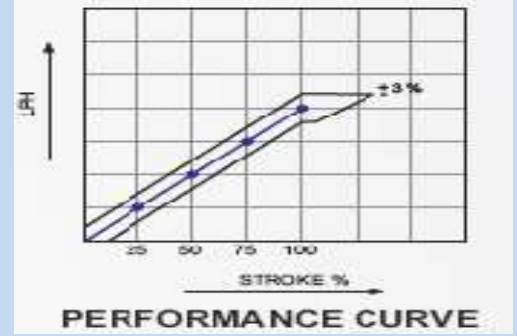


# TECHNICAL CATALOGUE

**MP V**

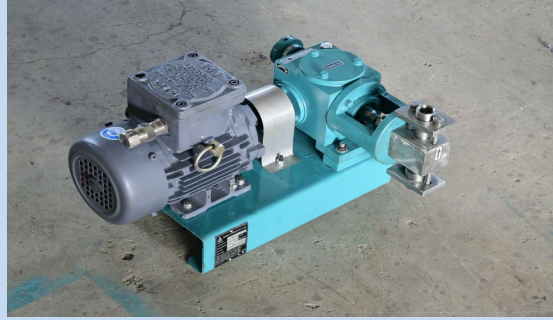

## SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia. mm	Max. Pr. Kg/cm <sup>2</sup>	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor (KW)				Cap. LPH	Suc. Del. mmNB/BSP	Motor (KW)
1.5	15	0.18	MP V	6	10	2.8	15	0.18
2.8	15			8	10	5	15	
4.2	15			10	10	7.8	15	
6.1	15			12	10	11.3	15	
11	15			16	10	20	15	
17	15			18	10	30	15	
24	15							

## MATERIAL OF CONSTRUCTION

1	Plunger	EN 8
2	Liquid End	SS 304,316,316 L,HASTEALLOY
3	NRV	SS 304,316,316 L,HASTEALLOY

## FEATURES :

- a Different Flow Rates can be achieved in a single model with stroke adjustment feature
- b The design & Performance of Hyd Series Pumps conforms to API675.

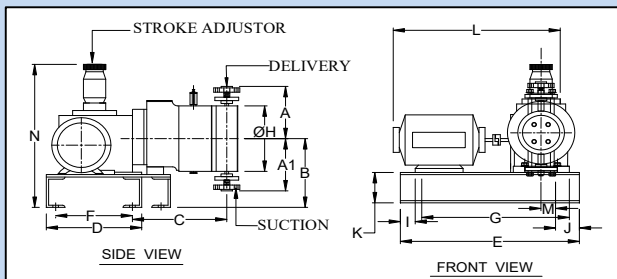

## PUMP DIMENSIONS IN MM

L	H	h	W	A	B	C	D	d
300	370	75	105	250	125	110	125	16

WEIGHT (App) : 25 KG.

PACKING SIZE : 18 x 16 x 16 Inches



# MINIMAX PUMPS PRIVATE LIMITED

Address: PLOT NO.82/2, BEHIND SEVA SERVICE CENTER, AMBEBAHULA GAON ROAD, VILHAR, NASHIK-422010

CONTACT: 9130022891, 9130022892, 9130022893, 9890147773

Email id: [minimaxpumpspvtltd@gmail.com](mailto:minimaxpumpspvtltd@gmail.com), [rotomaxpumps@gmail.com](mailto:rotomaxpumps@gmail.com), [mkt@minimaxpumps.com](mailto:mkt@minimaxpumps.com), [sales@minimaxpumps.com](mailto:sales@minimaxpumps.com)



ISO 9001 2008