


MP-60



SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNGER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. NB/BSP	Motor k.w
102	25	2.2	MP - 60	20	200	204	25	2.2
147	25			24	200	293	25	
361	25			32	155	521	25	
407	25			40	100	815	25	
587	25	3.7		48	69	1173	40	3.7
742	40			54	55	1485	40	
979	40			62	41	1957	40	
1074	40	5.5		65	37	2151	40	5.5
1320	40			72	30	2639	40	
1400	40			74	28	2800	50	
1753	40			83	23	3506	80X50	
2061	40			90	19	4122	80X50	
2545	80X50			100	15	5089	80X80	
3080	80X50			110	12	6158	80X80	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20	2	Gland Packing	PTFE
3	Through Bush	SS304, SS316, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

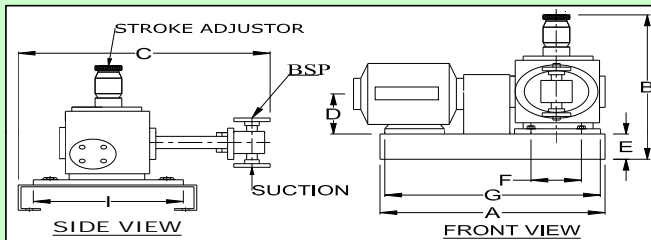

DIMENSIONS IN MM

A	B	C	D	E	F	G	I
800	600	870	210	75	350	640	440

WEIGHT (App) : 250 KG.

PACKING SIZE : 39 x 39 x 27 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.

Tel. : +91-253-6649383 Cell : + 91-9130022891, 9130022894

E-mail : minimaxpumpspvtltd@gmail.com

Web:www.dosingpumpsindia.co.in / www.minimaxdosing.co.in,



ISO 9001 2008