


## HDMP-35 S2

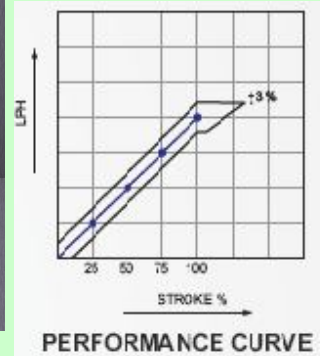

### SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm <sup>2</sup>	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
59	15	100	0.75/1.1	HD MP-35 S2	20	50	119	15	100	0.75
86	15				24	48	171	15		
152	25				32	46	304	25		
238	25	80	1.1/ 2.2		40	44	475	25	80	
342	25				48	39	684	25		
433	25				50	31	742	25		
571	25	20			60	23	1068	25	20	

### MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	4	NRV Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20,P.P.,PVC,PTFE	5	NRV Balls	SS304,SS316 PTFE, Glass, Ceramic
3	Non Return	SS304, SS316, alloy20,P.P.,PVC,PTFE			

### FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset. Jacketing head available
- The design & Performance of Pumps conforms to API675.

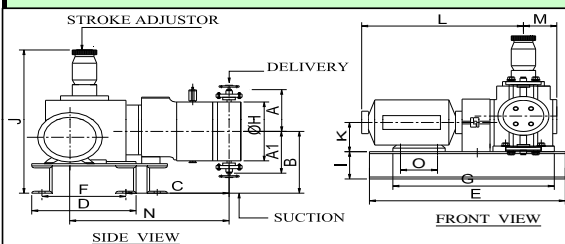

### DIMENSIONS IN MM

A	A1	B	C	D	E	F	G	H
205	205	275	240	560	605	305	543	Ø150
I	J	K	L	M	N	O		
75	490	90	590	180	640	125		

WEIGHT (App) : 140 KG.  
PACKING SIZE : 28 x 24 x 23 Inches