



## HDMP-35 S3

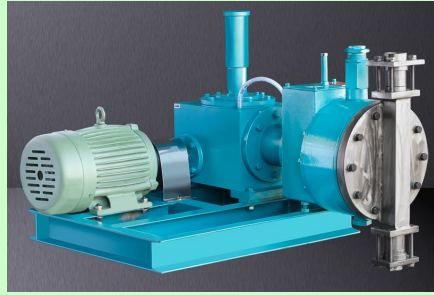

### SELECTION CHART


| PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM |                    |               |           | MODEL    | PL. Dia mm | Max. Pr. Kg/cm <sup>2</sup> | PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM |                    |               |           |
|---|--------------------|---------------|-----------|----------|------------|-----------------------------|--|--------------------|---------------|-----------|
| Cap. LPH  | Suc. Del. mmNB/BSP | % Of Max. Pr. | Motor k.w |          |            |                             | Cap. LPH   | Suc. Del. mmNB/BSP | % Of Max. Pr. | Motor k.w |
| 571   | 25                 | 40            | 1.1       | HDMP35S3 | 60         | 23                          | 1141   | 25                 | 40            | 3.7       |
| 627   | 40                 |               |           |          | 66         | 21                          | 1293   | 40                 |               |           |
| 770   | 40                 |               |           |          | 72         | 17                          | 1540   | 40                 |               |           |
| 1023  | 40                 |               |           |          | 84         | 13                          | 2094   | 40                 |               |           |
| 1203  | 40                 | 25            | 5.5       |          | 90         | 11                          | 2404   | 40                 |               |           |
| 1484  | 40                 |               |           |          | 100        | 9                           | 3000   | 40                 |               |           |

### MOC CHART

| Sr.No. | Description | MOC                                 | Sr.No. | Description      | MOC                      |
|--------|-------------|-------------------------------------|--------|------------------|--------------------------|
| 1      | Plunger     | EN 8                                | 4      | NRV Sealing Ring | PTFE                     |
| 2      | Liquid Head | SS304, SS316, alloy20,P.P.,PVC,PTFE | 5      | NRV Balls        | SS, PTFE, Glass, CeramiC |
| 3      | Non Return  | SS304, SS316, alloy20,P.P.,PVC,PTFE |        |                  |                          |

### FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

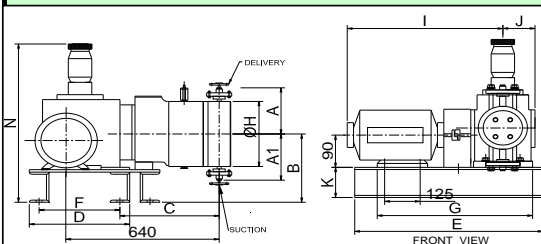

### DIMENSIONS IN MM

| MODEL  | A   | A1  | B   | C   | D   | E   | F   | G   | H    | I   | J   | K  | N   |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|----|-----|
| MM III | 255 | 255 | 275 | 240 | 560 | 605 | 305 | 543 | Ø290 | 590 | 108 | 75 | 290 |

WEIGHT (App) : 200 KG.  
PACKING SIZE : 32 x 28 x 27 Inches

# MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328 MIDC,  
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.  
Tel. : +91-253- 6649383  
Service cell : + 91-9130022891, 9130022894, 9130022893  
E-mail : sales@minimaxdosing.com / minimaxpumpspttd@gmail.com  
Website : [www.dosingpumpsindia.co.in](http://www.dosingpumpsindia.co.in) / [www.minimaxdosing.co.in](http://www.minimaxdosing.co.in),



ISO 9001 2008