



Technical Catalogue

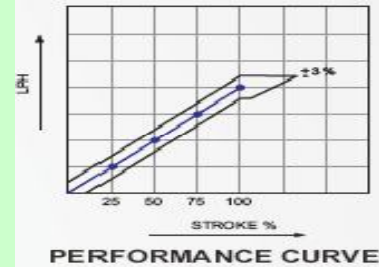

MINIMAX PUMPS PVT. LTD.
AN ISO 9001:2008 COMPANY

MP-20

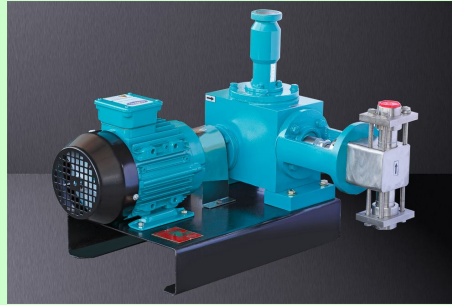

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1440 RPM			MODEL	PLUNG ER Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1440 RPM		
Cap. LPH	Suc. Del. mmNB/BSP	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	Motor (k.w.)
15	15	0.37	MP - 20	14	120	33	15	0.75
31	15			20	99	68	15	
49	15			24	69	98	15	
87	15			32	38	174	15	
136	15			40	25	271	25	
164	15			44	20	328	25	
195	15			48	17	391	25	
280	25	0.75		54	13	560	25	
326	25			62	10	652	25	
358	25			65	9	716	25	
381	25			67	8	761	25	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20	2	Gland Packing	PTFE
3	Through bush	SS304, SS316, hastalloy, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, hastalloy, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

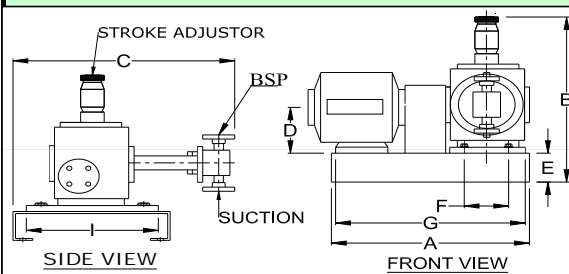

DIMENSIONS IN MM

MODEL	A	B	C	D	E	F	G	I
MM II	402	405	450	75	70	90	385	268

WEIGHT (App) : 62 KG.

PACKING SIZE : 20 x 20 x 17 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.

Tel. : +91-253- 6649383,

Mobile : 09130022891, 9130022894, 9130022893

E-mail : minimaxpumpsprivattd@gmail.com

Website : www.dosingpumpsindia.co.in / www.minimaxdosing.co.in,



ISO 9001 2008